



CSA502-P043T01

V1.0

CSA502-P043T01

于

于

不

七

1.

CSA502-P043T01

七 为

/

2.

3.

MRI

4.
 $T_A=25^{\circ}\text{C} \pm 5^{\circ}\text{C} \quad U_C=\pm 48\text{V} \quad R_M=2$

(DC)	I_{PNDC}	--	-5000	--	5000	A
(AC rms)	I_{PNAC}	--	--	3536	--	A
	I_{POL}		-6000	--	6000	A
(DC)	U_c		--	± 48	--	V
	K_N		5000:1			--
	I_{SN}		--	± 1.0	--	A
	R_M	--	0	--	2	

5.

-

	X_e		--	--	10	*
	X_{Ge}	50Hz/60Hz	--	--	100	*
			--	--	0.3438	
	L	--	--	--	2	*
	T_{COUT}	--	--	--	0.1	(*)/K
	TT	--	--	--	0.2	(*)/month
	TV	--	--	--	1	(*)/V
	I_o	$25\pm 10^{\circ}\text{C}$	--	--	2	*
	I_{oT}		--	--	± 10	*
	I_n	DC ~ 10Hz	--	--	0.5	*
	t_r	--	--	--	1	s
	di/dt	--	200	--	--	A/ s
(- 3dB)	BW	--	0	--	20	kHz


*

6.


	T_A	--	-10	--	+70	°C
	T_S	--	-25	--	+85	°C
	m	--	23±0.1			kg

7.

8.2 下




	下
1	VSS
2	GND
3	VCC



	下		下
1	NC	5	NC
2	NC	6	M_V+
3	GND	7	M_V-
4	M_A	--	--

- 下
- VCC
- VSS
- GND
- M_V+
- M_V-
- M_A

8.3

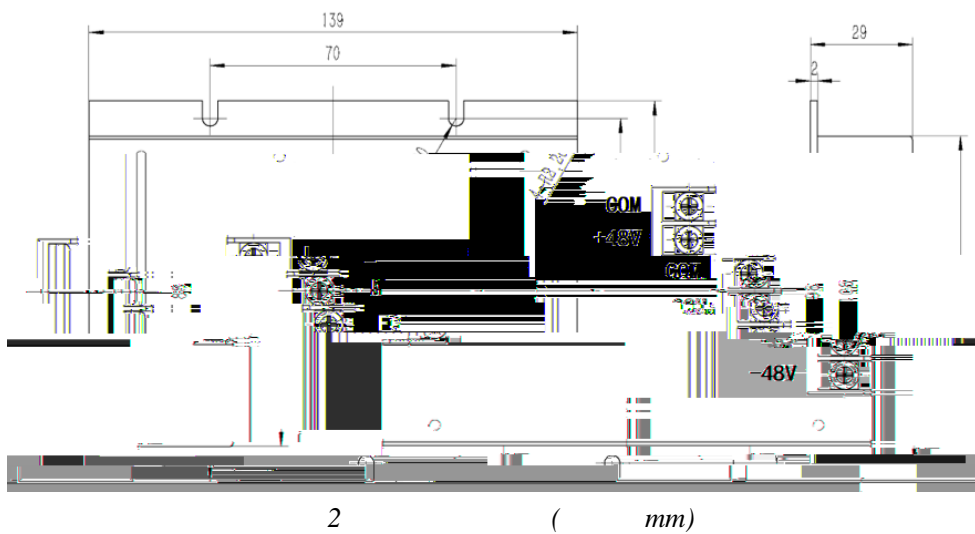

2 (mm)

	L	N	FG	COM	+48V	COM	COM	-48V	-48V
下					48V			48V	48V

